



SENNHEISER

Headmic 1

Model: Headmic 1 (Black EW)
Headmic 1 (Beige EW)
Headmic 1 (Silver EW)
Headmic 1 (Black 3-Pin)
Headmic 1 (Beige 3-Pin)
Headmic 1 (Silver 3-Pin)

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guida rapida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide

Kort vejledning
Pikaohje
Σύντομες οδηγίες
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
요약 안내서



www.sennheiser.com/download



Sennheiser electronic SE & Co. KG

Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com

Printed in Germany, Publ. 10/25, 587492/A06

www.sennheiser.com/documentation

In the box


	Connector			
Headmic 1 (EW)	3.5 mm	•	•	•
Headmic 1 (3-Pin)	3-Pin	•	•	•

Setup

3.5 mm jack plug



3-Pin connector

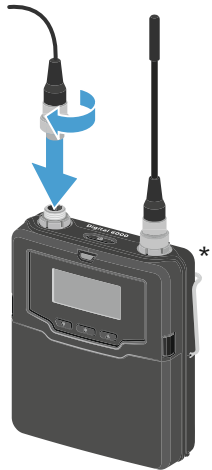

*not included

Frequency cap

MZC 1-2



+ 4 dB

MZC 1-1*



+ 2 dB

or

*not included







Windshield

SL MZW 1








- 10 dB


Wearing

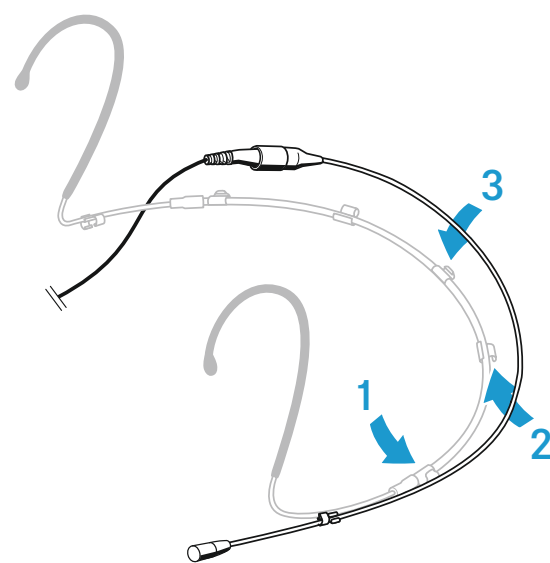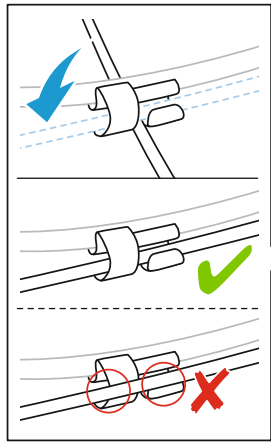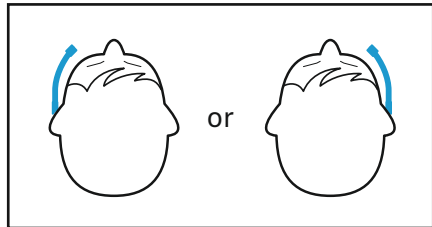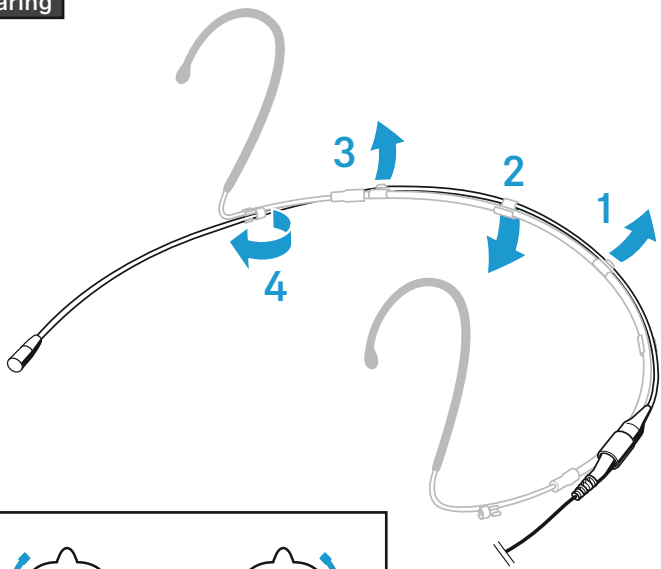


Adjusting

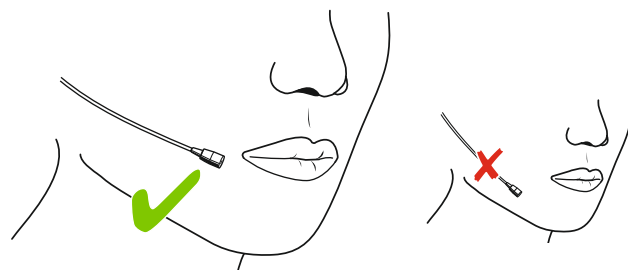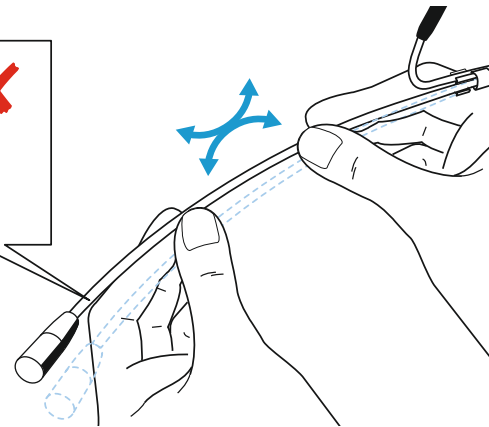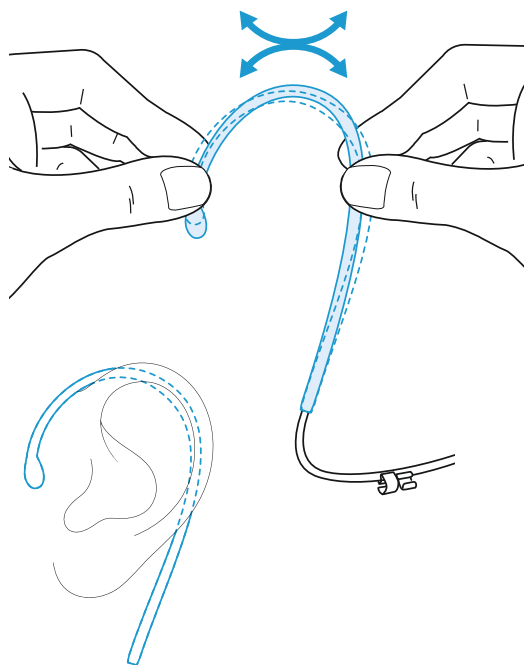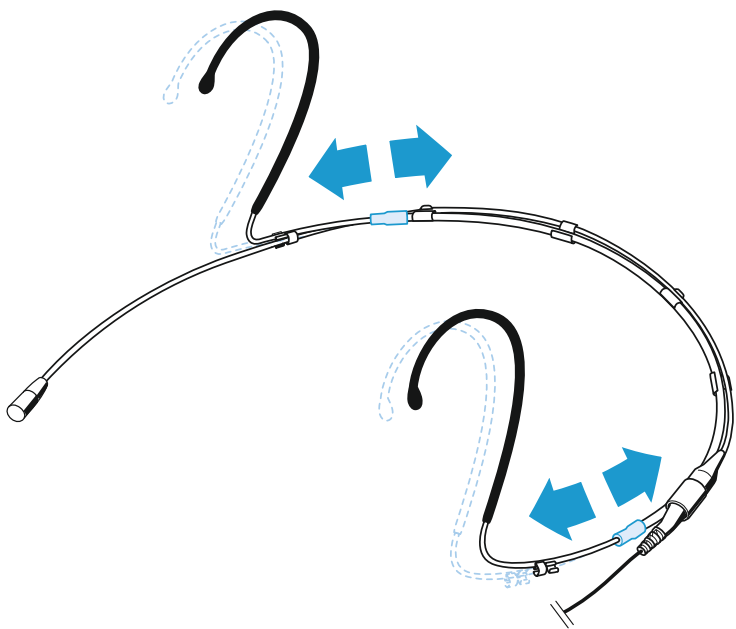


Cleaning

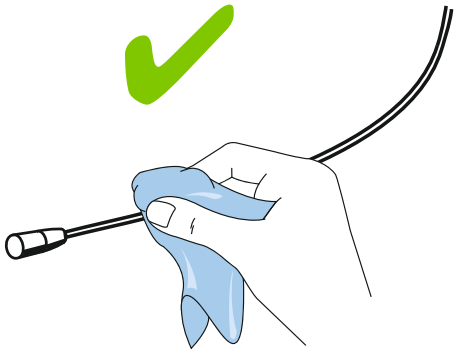


1




2




3



4




Accessory

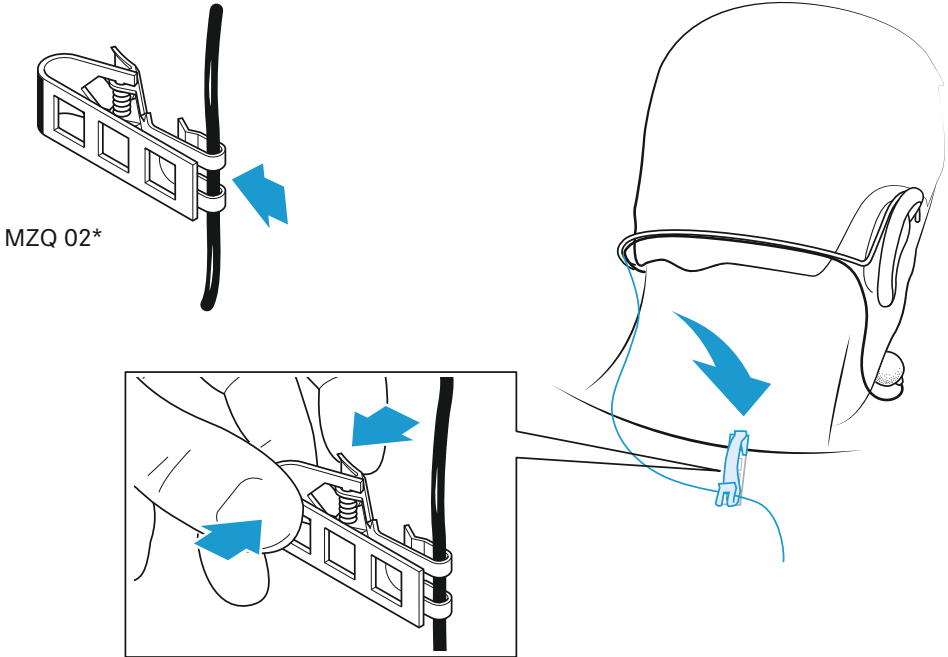

*not included

Polar pattern

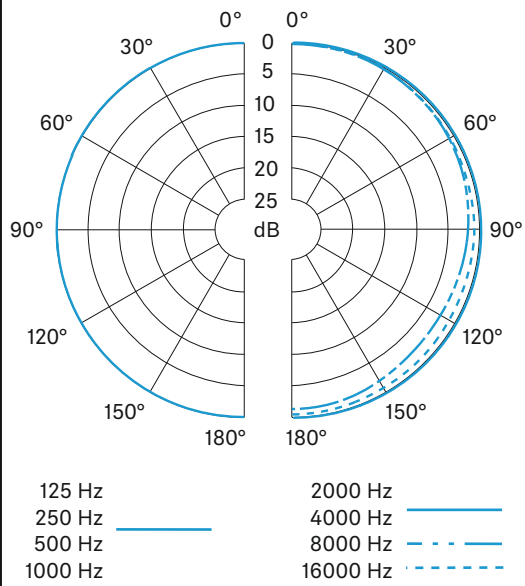

Specifications

Frequency response	20 – 20,000 Hz ±3 dB
Pick-up pattern	omni-directional
Nominal impedance	1 kΩ
Min. terminating impedance	4.7 kΩ
Sensitivity	5 mV/Pa ±3 dB
Diameter of mic capsule	3.3 mm
Max. sound pressure level	143 dB
Equivalent noise level	27 dB(A)
Supply current	approx. 240 µA
Power supply	4.5 – 15 V
Operating temperature	-10 °C to +50 °C
Storage temperature	-20 °C to +70 °C
Relative humidity	max. 95 %
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight (without cable)	7 g
Connector	3.5 mm jack plug or 3-Pin connector

Frequency response

